




velden xl



reddot winner 2023



fully prefabricated



tough ALU door



massive interior



double glazing




practical anteroom

Standard configuration:

DIMENSIONS	330 x 230 x 233 cm
WEIGHT	2100 kg
WINDOWS / GLAZING	3 sides double glazed / mirror bronze
DOOR	Aluminium frame, double glazed Door lock, antipanic - EN179
FLOORING	Tiles
INTERIOR WALLS	Rustic Tyrol wood cladding, heat treated and brushed
BENCHES	Thermo aspen
BACKREST	Thermo aspen
CONTROL UNIT	Premium touch control panel
COLOR LIGHT THERAPY	LED RGB under the bench and behind the backrest incl. remote control
HEATER	NN Premium heater 11 kW
FACADES	Glass, IPE wave, sheet metal on the back side
RAINWATER DRAINAGE	Rear wall-integrated concealed gutter with rear water outlet

Available options:

FACADES	Larch, IPE vertical, FMAX (cave, moonwalk, patina bronze, stonehenge, skyline), tyrol natural, tyrol black
GLAZING	Parsol dark grey, mirror/mirror+, transparent
HEATERS	Fin and Bio heaters from other manufacturers by request
ILLUMINATION	Digital addressable LED interior illumination, outdoor ambient illumination below sauna
IR HEATERS	Up to 2 pcs full spectrum heaters
WINDOW	Starry sky window

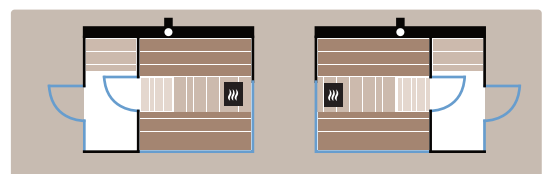

Conditions to be provided by the customer:

POWER CABLE: 400V / 5 x 2.5 mm² wire gauge, 3 x 16 Amp C-type fuse, 2 meter length, equipped with 400 volt 16A-6p-6h IP44 female connector. Your sauna will be supplied with the corresponding compatible connector, facilitating a hassle-free and secure electrical connection.

FOUNDATION: Flat and solid; a reinforced concrete slab, matching the dimensions of the sauna, with a thickness of 15 cm, the sauna is set on adjustable feet for leveling and alignment.

INSTALLATION: Accessibility to the installation site for crane delivery must be checked and ensured. **IMPORTANT:** It is the customer's responsibility to arrange for the crane or other delivery means and to clarify all requirements for installation in advance.

DELIVERY & ASSEMBLY: The sauna is prefabricated in the factory and is delivered directly to the construction site by prior arrangement. Generally, the customer is responsible for organizing all installation measures unless otherwise agreed. Final assembly, including electrical connection for testing, commissioning, functional testing, training, and handover will be carried out by the seller's or manufacturer's assembly team.

